

# Installation manual


## DAW 130/10 PP

## DAW 130/20 PP




PARTNER sp. z o.o.


- 1 After unpacking the carton, unscrew the bolts from the back cover of the speaker and lift it to a distance that does not cause the internal wiring to break or come loose.

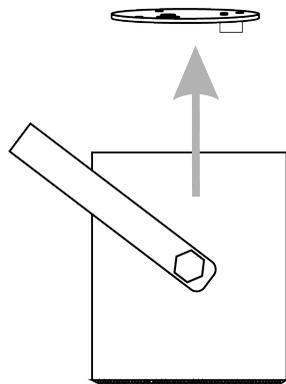



- 2 Feed the wires from the cable line side through the rubber glands of the cover to the inside of the loudspeaker. It is suggested to cut the cable insulation beforehand for easier mounting in the ceramic block (the internal wire isolation should be cut at least 7 mm).

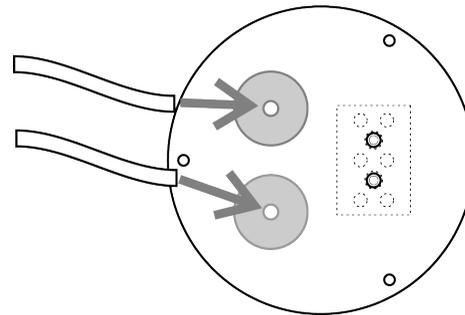

- 3 Screw the wires, led through the speaker's cover to the ceramic block as shown in the diagram below. Check the stability of the connection. For more safety in wires connection, a metal sleeve shall be used to connect the two wires in the terminal.

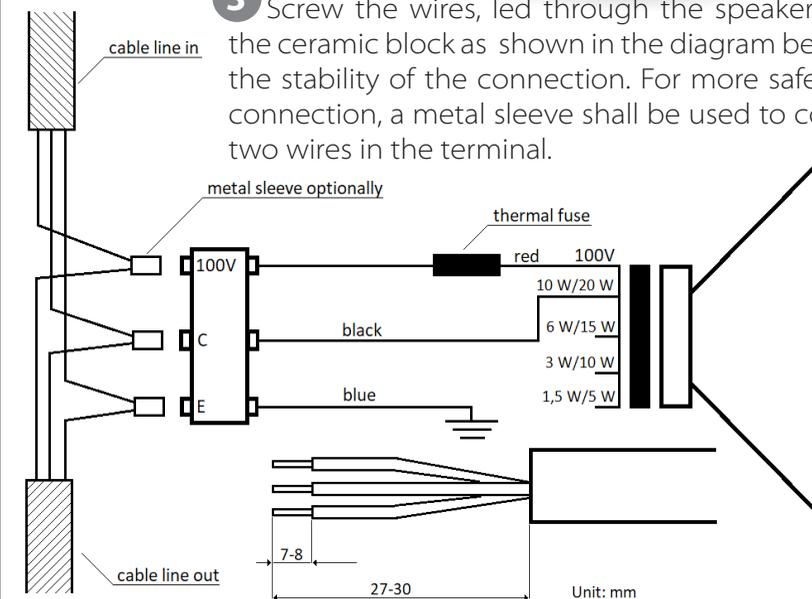

- 4 „Fix the loudspeaker to the wall or ceiling (depending on installation design guidelines) using a metal U frame. Screw the back cover to the speaker housing. Check the stability and aesthetics of the fixing and the tilt of the loudspeaker after installation, taking into consideration the acoustic conditions and the required sound radiation angle (or acoustic simulation suggestions if exist). It is allowed first to fix loudspeaker to the wall/ceiling and after this completing points 1, 2 and 3.

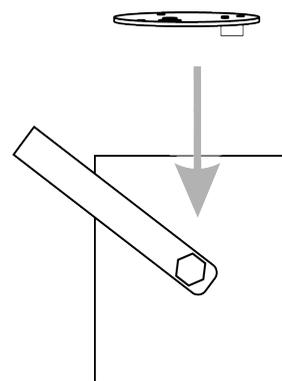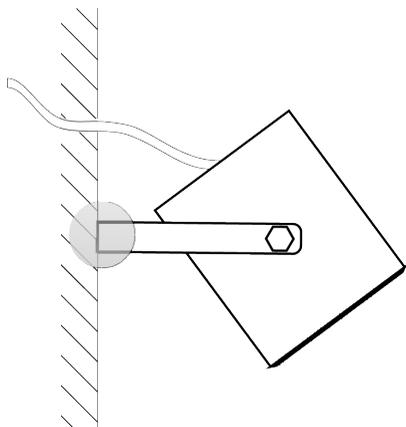

### SAFETY PRECAUTIONS:

1. After unpacking, check the speaker and its enclosure for damage;
2. Read this installation manual carefully before starting installation process – consider installation options from this instruction – depending on the number of wires in the cable line or the line control method;
3. Check if fitting method (ceiling, wall, pendant etc) complies with EN 54 certificate, catalogue data or local approval if concerns;
4. Install the speaker only in a location that can structurally support the full weight of the unit and mounting bracket;
5. Do not use other methods than specified to install the speaker. Ensure that all screws are securely tightened. Do not mount the speaker in locations exposed to constant vibration. Not keeping above rules may cause the speaker could fall down, possibly resulting in personal injury;
6. When connecting speaker line cables check also if the power tap selected on the transformer is the correct one – follow system design. Change if necessary.
7. Make sure amplifier's power is switched off when connecting the speakers, to avoid electric shocks.

[www.partneraudio.eu](http://www.partneraudio.eu)

