

Installation manual

DEL-W 165/6 PP

DEL-W 165/10 PP




PARTNER sp. z o.o.

- 1** After unpacking the carton unroll the cable and check the length of the installation wires.





- 2** Insert 8-10 mm wires through the glands in the installation box.

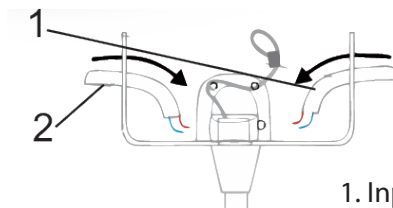


1. Input wire
2. Output wire

- 3** Connect the wires to the ceramic block as shown in the diagram below. Check the stability of the connection. For more safety in wires connection there should be used a metal sleeve to connect the two wires in the one terminal.

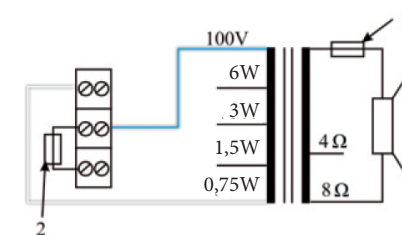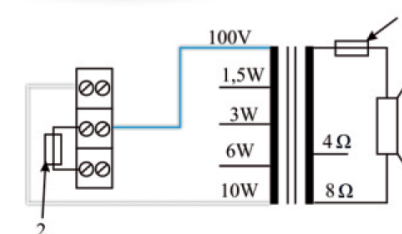

1. Thermal fuse
2. Fuse Overload

- 4** Attach the speaker's mounting bracket to the proper hook on the ceiling.

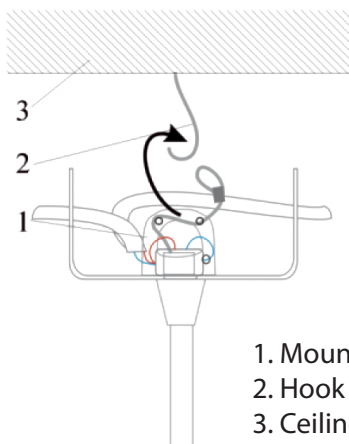

1. Mounting bracket
2. Hook
3. Ceiling

- 5** Attach the aluminum ties by connecting the steel wire with the wire, starting from the bottom of the installation box.

SAFETY PRECAUTIONS:

1. After unpacking, check the speaker and its enclosure for damage;
2. Read this installation manual carefully before starting installation process – consider installation options from this instruction – depending on the number of wires in the cable line or the line control method;
3. Check if fitting method (ceiling, wall, pendant etc) complies with EN 54 certificate, catalogue data or local approval if concerns;
4. Install the speaker only in a location that can structurally support the full weight of the unit and mounting bracket;
5. Do not use other methods than specified to install the speaker. Ensure that all screws are securely tightened. Do not mount the speaker in locations exposed to constant vibration. Not keeping higher above rules may cause the speaker could fall down, possibly resulting in personal injury;
6. When connecting speaker line cables check also if the power tap selected on the transformer is the correct one – follow system design. Change if necessary.
7. Make sure amplifier's power is switched off when connecting the speakers, to avoid electric shocks.

www.partneraudio.eu

