





- 1** After unpacking of the carton, install (screw) the rear mounting plate to the wall or ceiling.

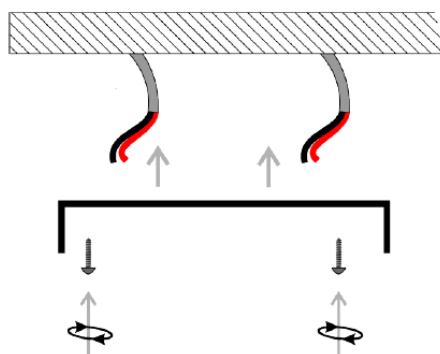


- 2** Connect the cables serially, then screw to the ceramic cubes*. Due to the use of on ceramic cube for each line, input and output wire should be connected using end sleeve.




* in version PP1 put wires inside the plastic quick connectors.

- 4** Attach the housing to the ceiling and adjust the holes to insert screws.


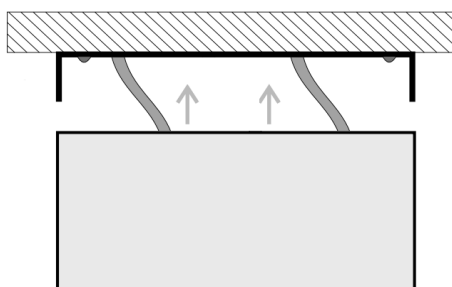


- 5** Screw the screws to the loudspeaker's round housing.

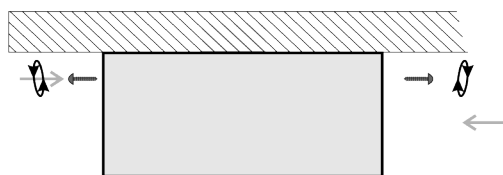

- 3** Select proper tapings (following system design) and connect cables to the transformer selecting proper power – look at the scheme of electrical connection.

Scheme with the 6W transformer connections

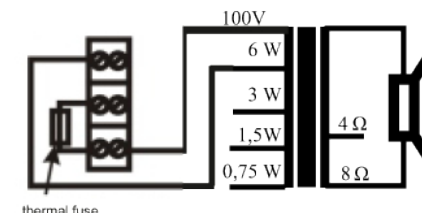

SAFETY PRECAUTIONS:

1. After unpacking, check the speaker and its enclosure for damage;
2. Read this installation manual carefully before starting installation process – consider installation options from this instruction – depending on the number of wires in the cable line or the line control method;
3. Check if fitting method (ceiling, wall, pendant etc) complies with EN 54 certificate, catalogue data or local approval if concerns;
4. Install the speaker only in a location that can structurally support the full weight of the unit and mounting bracket;
5. Do not use other methods than specified to install the speaker. Ensure that all screws are securely tightened. Do not mount the speaker in locations exposed to constant vibration. Not keeping above rules may cause the speaker could fall down, possibly resulting in personal injury;
6. Make sure amplifier's power is switched off when connecting the speakers, to avoid electric shocks.

