

## Installation manual DEL 165/6-A/B PP DEL 165/10-A/B PP

PARTNER Sp. z o.o.

1 After unpacking of the carton mount the speaker's cabinet in the ceiling hole, set the mounting springs carefully.



Insert the connection wires through the speaker's frame and through the rubber grommets in speaker's fire dome.




3 Set the fire dome so that the holes on the flange fit to the grapples on the fire dome and turn slightly (optionally push

the fire dome in until all three grapples have passed through the loudspeaker's frame, it should be confirmed by a "click").




4 Connect the cables serially, then screw to the ceramic cubes. Due to the use of one ceramic cube for each loudspeaker, each of lines, input and output wire, should be connected using metal sleeve.

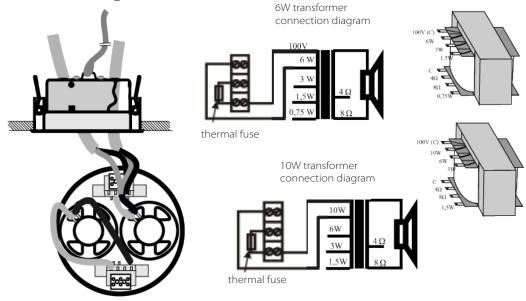

5 Check again, make sure that the connection is stable and the cables are fixed properly (please check if the right transformer's tapping was selected). Recheck if the cable connection is stable and that the speaker's cabinet is securely mounted to the false ceiling and grinded well.

6 Mount the speaker's grille to the housing, pressing and then turning it to the right.



## **SAFETY PRECAUTIONS:**

- 1. After unpacking, check the speaker and its enclosure for damage;
- 2. Read this installation manual carefully before starting installation process consider
- installation options from this instruction depending on the number of wires in the cable line or the line control method;
- 3. Check if fitting method (ceiling, wall, pendant etc) complies with EN 54 certificate.
- catalogue data or local approval if concerns;
- 4. Install the speaker only in a location that can structurally support the full weight of the unit
- and mounting bracket;
- 5. Do not use other methods than specified to install the speaker. Ensure that all screws are
- securely tightened. Do not mount the speaker in locations exposed to constant vibration.
- Not keeping above rules may cause the speaker could fall down, possibly resulting in personal injury;
- 6. Make sure amplifier's power is switched off when connecting the speakers, to avoid electric shocks.



