




DAD 260/10-A/B PP DAD 260/10-A/B PP1

Bi-directional A/B-line sound projector - the DAD 260/10-A/B PP series is an ideal solution for both music and voice evacuation announcements. Due to its directional characteristics, it is recommended for circulation routes. DAD 260/10-A/B PP is equipped with two independent full-range 130mm 10W speakers and 100V transformers to enable operation of 2 separate speaker lines in one loudspeaker enclosure. The powder-coated aluminum guarantees a high corrosion resistance. Mounting of this sound projector is very comfortable due to the stable aluminum foot with a width of 20 cm, under which connection blocks are hidden. The loudspeaker is painted in standard RAL 9010, but any other RAL color is available as an option. DAD 260/10-A/B is optionally offered in PP1 version – it means instead of ceramic block and thermal fuse it is equipped just with a plastic connection block.

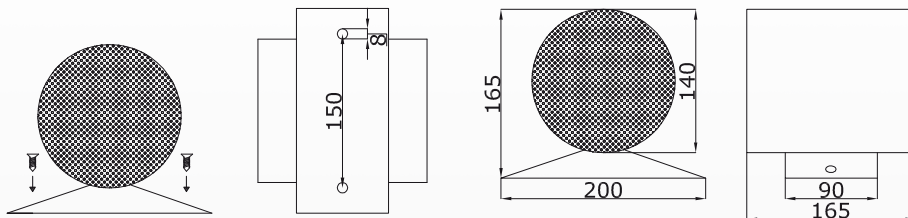

Model	DAD 260/10-A/B PP DAD 260/10-A/B PP1
Type	A/B line sound projector
Application	ceiling/wall
Certificate Number	1438-CPR-0575
Speaker Type	2x 130 mm full-range
Rated power [W]	2x10
Driver impedance [Ω]	8
Impedance 100V [Ω]	2x 1000/1666/3333/6666
Tappings 100V [W]	2x 10/6/3/1,5
Frequency Range (-10dB) [Hz]	145-15900*
SPL 1W/1 m [dB]	89**
SPL Pmax/1 m [dB]	100**
Sensitivity 1W/4 m EN 54-24 [dB]	77
SPL max (rated noise power/4 m) EN 54-24 [dB]	86 (single), 88 (double)
Dispersion -6dB, 500 Hz/1 kHz/2 kHz/4kHz [°]	360/280/110/70 (single)
	360/360/110/70 (double)
Connection PP/PP1	2x 2x3 pole ceramic cube, 2x 2x2 pole connector
Temperature range [°C]	<-10, +55>
Type A/B/C	A
IP Rating according to EN 54-24 / IP Rating	21C
Dimensions [mm]	Ø140x165 (diameter without hanging bracket)
Weight [kg]	2,75
Material	aluminium
Colour	RAL 9010
Packing Unit	8

* measured in institute other than BIP CNBOP - following PN-EN 60268-5:2005

**parameter calculated

