



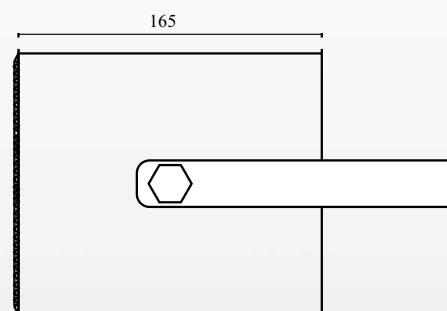

DAW 130/20 PP

The weatherproof sound projectors of the DAW 130/20 PP series are exceedingly suitable for outdoor use in open air baths and sport facilities. The resistant powdercoated aluminium grants a high corrosion resistance. The DAW 130/20 PP series can also be recommended for indoor applications in halls and corridors. Furthermore the mounting of the sound projector series is very comfortable due to the swivel-slope-technique of the U-mounting bracket.

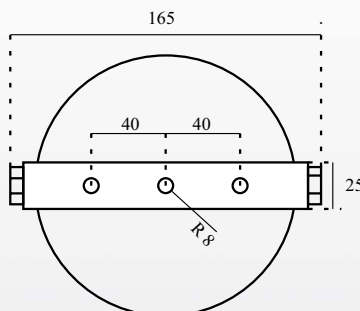

Specifications

Type	DAW 130/20 PP
Certificat	EN 54-24:2008 - 1438/CPD/0199
Loading rate	20 W
Chassis-type	130 mm full range
Frequency range (-10dB)	130 - 20 400 Hz
SPL 1W/1m	95,1 dB
SPL Pmax/1m	108,1 dB
Radiation angle 1.000 Hz (-10dB)	190°
Transformer	100 V, 20/15/10/5 Watt
Dimensions	Ø140 x 165 mm
Weight	2,9 kg
Material	powder-coated aluminium tube
Connection	3-pole ceramic clamp
Colour	RAL 9010 White / special colouring is possible for a surcharge
Protection IP	54
Packing unit	8