




PARTNER sp. z o.o.



DEL F 165/6 PP

This loudspeaker is ideally suited for a wide variety of applications because of its classic design and its excellent acoustic characteristics. The DEL F 165/6 PP, made of powder-coated metal with a 165 mm full range chassis is specially adapted for speech and background music reproduction in stores, rooms and hotels. The exceptional spring mounting with cropped leg springs guarantees an outstanding rapid ceiling installation. The fire dome F 165 is optionally available for a surcharge.

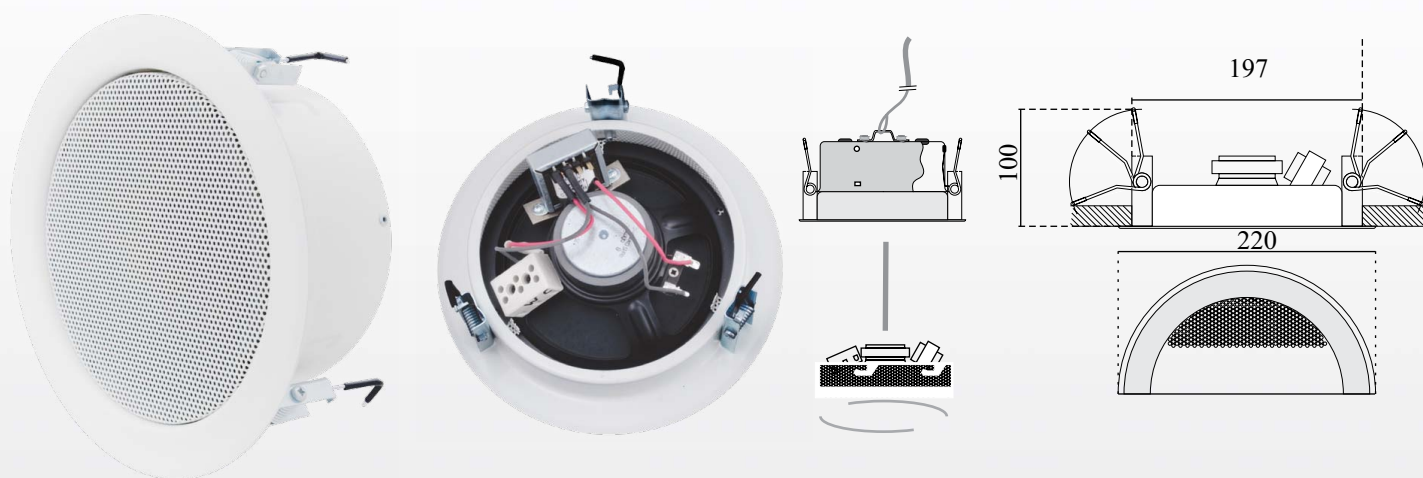

Dane techniczne

Oznaczenie	DEL F 165/6 PP
Certyfikat	EN 54-24:2008 - 1438/CPD/0177
Moc nominalna	6 W
Typ głośnika	165 mm szerokopasmowy
Zakres częstotliwości (-10dB)	380 - 22 500 Hz
SPL 1W/1m	100,7 dB
SPL Pmax/1m	108,5 dB
Kąt emisji 1.000 Hz (-10dB)	180°
Typ transformatora	100 V, 6/3/1,5/0,75 Watt
Wymiary	Ø220 x 100 mm
Otwór montażowy	Ø197 mm - Ø207 mm
Waga	1,3 kg
Materiał	Stal, malowana proszkowo
Złącze	3-stykowe złącze ceramiczne
Kolor	RAL-9010 Biały/cała paleta RAL
VPE	12