




**PARTNER sp. z o.o.**



## DEL F 165/10 PP

This loudspeaker is ideally suited for a wide variety of applications because of its classic design and its excellent acoustic characteristics. The DEL 165/10 PP, made of powder-coated metal with a 165 mm full range chassis is specially adapted for speech and background music reproduction in stores, rooms and hotels. The exceptional spring mounting with cropped leg springs guarantees an outstanding rapid ceiling installation. The firedome F 165 is optionally available for a surcharge.

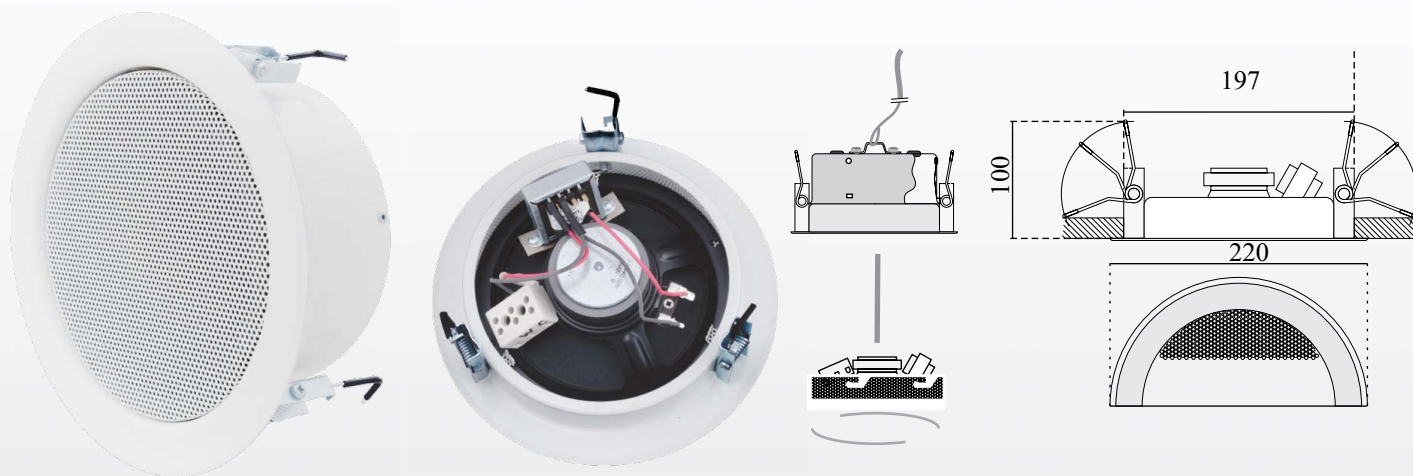

### Specifications

Type	DEL F 165/10 PP
Certificat	EN 54-24:2008 - 1438/CPD/0177
Loading rate	10 W
Chassis-type	165 mm full range
Frequency range (-10dB)	210 - 19 300 Hz
SPL 1W/1m	100,5 dB
SPL Pmax/1m	110,5 dB
Radiation angle 1.000 Hz (-10dB)	180°
Transformer	100 V, 10/6/3/1,5 Watt
Dimensions	Ø220 x 100 mm / installation depth
Cut out	Ø197 mm - Ø207 mm
Weight	1,6 kg
Material	powder-coated, steel panel
Connection	3-pole ceramic clamp
Colour	RAL 9010 White / special colouring is possible for a surcharge
Packing unit	16