




DEL 165/10 plus PP

Due to its 2-ways version this loudspeaker makes an equal allocation in all directions possible and shows at the same time excellent acoustic characteristics and a high efficiency. For that reason this loudspeaker differentiates itself from the classic ceiling loudspeakers. The DEL 165/10 plus PP, made of powdercoated metal, is ideally suited for a wide variety of applications. The exceptional spring mounting with cropped leg springs guarantees an outstanding rapid ceiling installation.

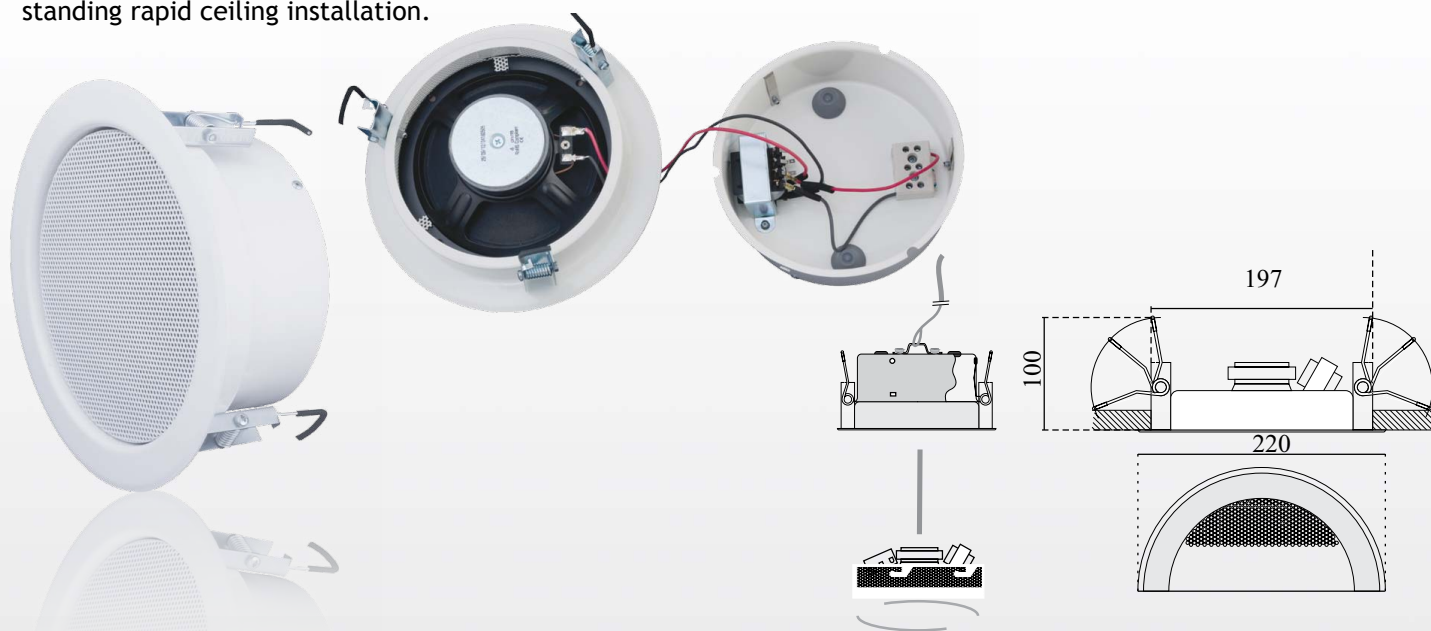

Specifications

Type	DEL 165/10 plus PP
Certificat	EN 54-24:2008 - 1438/CPD/0251
Loading rate	10 W
Chassis-type	165 mm two-way
Frequency range (-10dB)	85-20 700 Hz
SPL 1W/1m	99,1 dB
SPL Pmax/1m	106,8 dB
Radiation angle 1.000 Hz (-10dB)	180°/170°/ 105°/ 55°
Transformer	100 V, 10/6/3/1,5 Watt
Dimensions	Ø220 x 110 mm
Cut out	Ø197 mm - Ø207 mm
Weight	1,7 kg
Material	powder-coated, steel panel
Connection	3-pole ceramic clamp
Colour	RAL-9010 White/special colouring is possible for a surcharge
Packing unit	12