







PARTNER sp. z o.o.



DAL 165/6 PP

This surface-mounted ceiling speaker, made of powder-coated metal, shows excellent acoustic characteristics and a high efficiency and therefore it is ideally suited for a wide variety of applications. The mounting brackets allow the installation on ceilings and walls, even where a regular installation would not be possible.

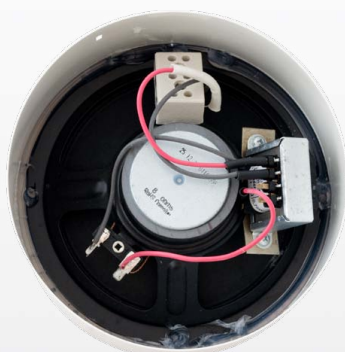

Specifications

Type	DAL 165/6 PP
Certificat	EN 54-24:2008 - 1438/CPD/0245
Loading rate	6 W
Chassis-type	165 mm full range
Frequency range (-10dB)	220 - 21 000 Hz
SPL 1W/1m	99,7 dB
SPL Pmax/1m	109,7 dB
Radiation angle 1.000 Hz (-10dB)	180°
Transformer	100 V, 10/6/3/1,5/0,75 Watt
Dimensions	Ø170 x 75 mm
Weight	1,3 kg
Material	powder-coated, steel panel
Connection	3-pole ceramic clamp
Colour	RAL 9010 White / special colouring is possible for a surcharge
Packing unit	12