

Installation manual


WAL 165/6 PP

WAL 165/10 PP








PARTNER sp. z o.o.


- 1 After unpacking the carton feed the wires through the hole in the back cover and fix it to the wall.

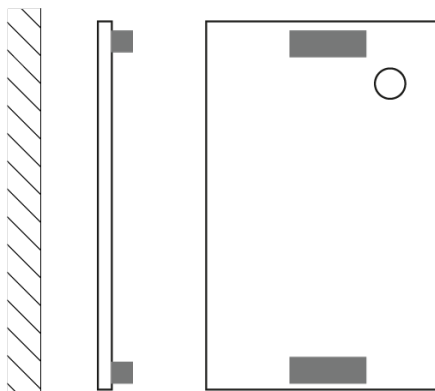

- 2 Connect the wires to the ceramic block as shown on the diagram below. For more safety in wires connection there should be used a metal sleeve to connect the two wires in the one terminal.

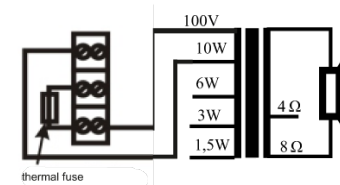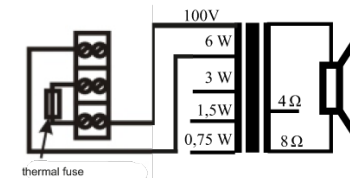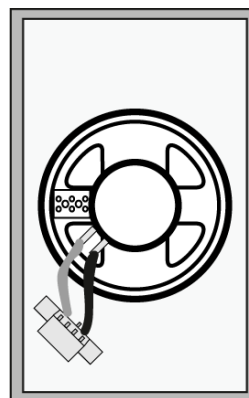

- 3 Mount the loudspeaker's housing to the back cover by screwing the screws to it.

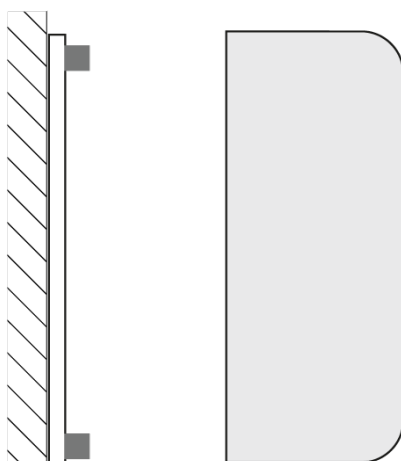

SAFETY PRECAUTIONS:

1. After unpacking, check the speaker and its enclosure for damage;
2. Read this installation manual carefully before starting installation process – consider installation options from this instruction – depending on the number of wires in the cable line or the line control method;
3. Check if fitting method (ceiling, wall, pendant etc) complies with EN 54 certificate, catalogue data or local approval if concerns;
4. Install the speaker only in a location that can structurally support the full weight of the unit and mounting bracket;
5. Do not use other methods than specified to install the speaker. Ensure that all screws are securely tightened. Do not mount the speaker in locations exposed to constant vibration. Not keeping above rules may cause the speaker could fall down, possibly resulting in personal injury;
6. When connecting speaker line cables check also if the power tap selected on the transformer is the correct one – follow system design. Change if necessary.
7. Make sure amplifier's power is switched off when connecting the speakers, to avoid electric shocks.

www.partneraudio.eu

